

## TECHNICAL DATA SHEET

### AMLTAL IP44 / Aga-Led® Type A

VERSION - 13.11.2015


#### STANDARD LUMINAIRE

Reference	AMLTAL
Protection Class	IP44
Lighting Source	Aga-Led® Type A
Connector	Rigid Loop on B'Light conductor 16mm <sup>2</sup>
Dimensions	120 x 60mm
Standard Length	610 - 910 - 1210 - 1510mm
Length on measure	on request up to 2965
Nb Lighting Unit	34 LED/m
Voltage	24V
Power	34 W/m
Connecting Cable	1m standard cable 2x1.5mm <sup>2</sup>
Fixation	FIX
End Caps	ARL + EFA

#### APPLICATION: Miroirs, walls



#### AMLTAL / AGA-LED® TYPE A - Rigid Loop

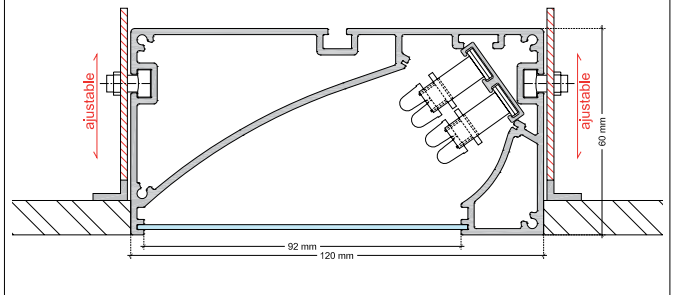

#### FINISH


##### Color Finishing Profil

Standard	Natural Anodised Aluminium
On request	Thermo-Enameling Powder Coating RAL Color Anodising Polished Aluminium Chrome Aspect Polished Aluminium Gold Aspect Plywood

##### Glass Finishing

Standard	VER: Opaline Glass
On request	VERC: Clear Glass

#### FIXATION : FIX



#### ON REQUEST

Connecting Plug	AMS / AF
Dimming Option	1-10V, Dali, KNX Ask technical department for more information

#### ON REQUEST : Connecting plug AMS/AF



#### LIGHTING SOURCE

Lighting Source	Aga-Led® Type A
Ref	A10
Voltage	24V
Power	1W
Beam Angle	15°
CRI	80
Lifetime	60'000h
Working T°	-30°C ~ +55°C
Option	AGC: Anti Glare Optic



#### Color Temperature & Luminous Flux / Unit

CCT	2800K	4000K
Luminous Flux/Unit	40 lm	45 lm

#### CERTIFICAT



#### AGABEKOV



AGABEKOV SA Manufacture 6, ROUTE DE COMPOIS  
CH-1222 VÉSENAZ - GENEVA - SWITZERLAND  
Tel. +41 22 752 47 45 Fax. +41 22 752 37 08  
E - mail: info@agabekov.com



AGABEKOV SA Bureau d'etudes 6, ROUTE DE COMPOIS  
CH-1222 VÉSENAZ - GENEVA - SWITZERLAND  
Tel. +41 22 752 47 45 Fax. +41 22 752 37 08  
Internet: www.agabekov.com

