

TECHNICAL DATA SHEET

LED Track Light / EN-TLI030-03, EN-TLI030-04

VERSION - 01.09.2017

STANDARD LUMINAIRE

| | |
|------------------|--|
| Reference | EN-TLI030-03 EN-TLI030-04 (built-in dimmer) |
| Power | 30 W |
| Current | 700 mA |
| Protection Class | IP20 |
| Dimensions | 3-pin track: $\varnothing 75 \times 176.5 \times \text{Ht.} 243.4\text{mm}$ 4-pin track: $\varnothing 76 \times 215.1 \times \text{Ht.} 246\text{mm}$ |
| Voltage | AC220-240V, 50-60Hz |
| Led Type | Cree Cob Led |
| CRI | 80+ OR 90+ |
| Beam Angle | 15°, 25° or 38° |
| Dimmable | Yes |
| Installation | Track, Pendant or Surface-Mounted |
| Working T° | -20°C ~ +45°C |
| Warranty | 5 years |

MAIN FEATURES:

- Sleek design with built-in driver
- Beam angle can be changed easily by replacing reflectors without any tool.
- Track head rotates through 355° and pivots through 90°

APPLICATION:

- Optimum accent lighting for museums, exhibitions, art galleries, sales and showroom areas.



FINISH

Standard White, Black, Silver

ON REQUEST

| | |
|-------------------|---|
| CRI | 80+, 90+ |
| Beam Angle | 15°, 25° or 38° |
| Installation Type | On 3-pin track On 4-pin track Pendant Surface-Mounted |
| Dimming Option | Triac, 1-10V <i>Ask technical departement for more information</i> |

COLOR TEMPERATURE & LUMINOUS FLUX

EN-TLI030-03 + EN-TLI030-04


| | | | |
|-------------------|-------------------|-------------------|-------------------|
| 2'700K | 3'000K | 4'000K | 5'000K |
| 2345 lm $\pm 5\%$ | 2550 lm $\pm 5\%$ | 2698 lm $\pm 5\%$ | 2785 lm $\pm 5\%$ |

CERTIFICAT

CE

TECHNICAL DRAWINGS

3-pin track

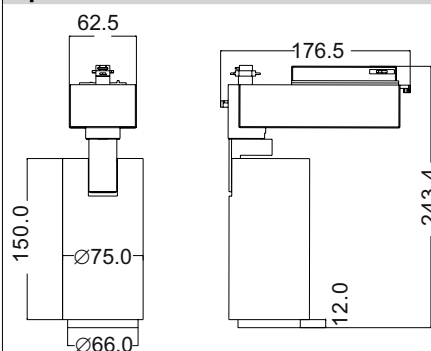

4-pin track

