

TECHNICAL DATA SHEET

LFALC IP20 / Aga-Led® Type B

VERSION - 06.07.2017


STANDARD LUMINAIRE

Reference	LFALC
Protection Class	IP20
Lighting Source	Aga-Led® Type B
Connector	4 Positions on B'Light conductor 16mm ²
Dimensions	13x23mm
Standard Length	330 - 670 - 1000 - 1330 - 1670 - 2000mm
Length on measure	on request up to 3000mm
Nb Lighting Unit	18 LED/m
Voltage	24V
Power	17.28W/m to 21.60 W/m
Connecting Cable	COS3: 1m standard cable 2x1.5mm ²

APPLICATION: cornices, handrails, stairs, shelves



LFALC / AGA-LED® TYPE B - 4 Positions

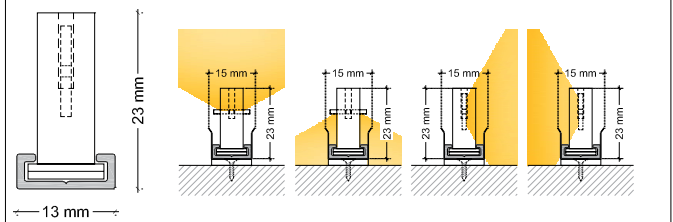

FINISH

Color Finishing Profil

Standard	Natural Anodised Aluminium
On request	Thermo-Enameling
	Powder Coating RAL
	Color Anodising
	Polished Aluminium Chrome Aspect
	Polished Aluminium Gold Aspect

ON REQUEST


Fixation	BFA (fixed with screw) FCP (fixed with screw) FCP-S (fixed with tape & screw)
Connecting Cable	COS4 - COS4a
Connecting Plug	AMS / AF
Dimming Option	1-10V, Dali, KNX <i>Ask technical departement for more information</i>

ON REQUEST: LFALC Fixation




FCP-S

(fixed with tape & screw)




FCP

(fixed with screw)



ON REQUEST: LFALC Fixation BFA



LIGHTING SOURCE

Lighting Source **Aga-Led® Type B - Generation 2**

Ref	B3	B6	
Power	0.96W	1.2W	
Voltage	24V	24V	
Beam Angle	120°	120°	
CRI	80	80	
Lifetime	50'000h		
Working T°	-20°C to +45°C		
Environmental protection	Modified acrylate resin		

Color Temperature & Luminous Flux / Unit

	2200K	2400K	2700K	3000K	4000K
Aga-Led® B3-G2	--	97 lm	137lm	137lm	137lm
Aga-Led® B6-G2	129 lm	140 lm	166 lm	166 lm	166 lm

ON REQUEST : Connecting Cable

COS4 Linear bridging



2x8cm conductors of 2.5mm²

COS4a Corner bridging



1x8cm conductors of 2.5mm²
1x11cm conductors of 2.5mm²

ON REQUEST : Connecting plug AF/AMS



CERTIFICAT

