

## TECHNICAL DATA SHEET

### Hanging Rod with Light / LPX-AC Plywood Finish IP20 / Xenon

VERSION - 03.08.2016


#### STANDARD LUMINAIRE

Reference	LPX-AC Wood Finish	
Protection Class	IP20	
Lighting Source	Xenon	
Connector	Rigid Loop on B'Light conductor 16mm <sup>2</sup>	
Dimensions	ø34mm	
Standard Length	330 - 1000 - 1670 - 2000mm	
Length on measure	on request up to 3000mm	
Nb Lighting Unit	17 bulbs/m	
Voltage	24V	
Power	3W	5W
	51 W/m	85 W/m
Connecting Cable	1m standard cable 2x2.5mm <sup>2</sup>	
Wall Fixation	FT1-W	
Grid	GRPR	

#### APPLICATION: Wardrobes Lighting



#### LPX-AC Wood Finish / Xenon - Rigid Loop / Grid :GRPR

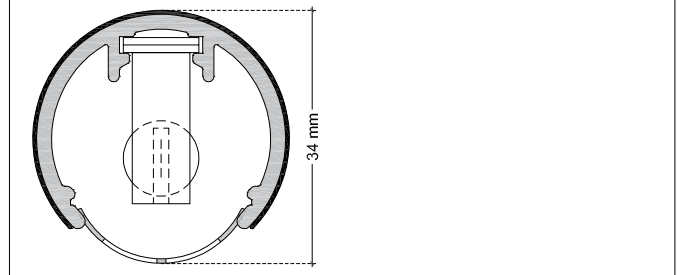

#### FINISH

##### Color Finishing Profil

Standard Plywood

##### Glass Finishing

Standard VFC: Clear Glass

On request VFO: Opaline Glass


##### Wall Fixation & Median Support Finishing

Standard Natural Anodised Aluminium

On request  
*Thermo-Enameling*  
*Powder Coating RAL*  
*Color Anodising*  
*Polished Aluminium Chrome Aspect*  
*Polished Aluminium Old Gold Aspect*

#### WALL FIXATION : FT1-W

Not available in plywood

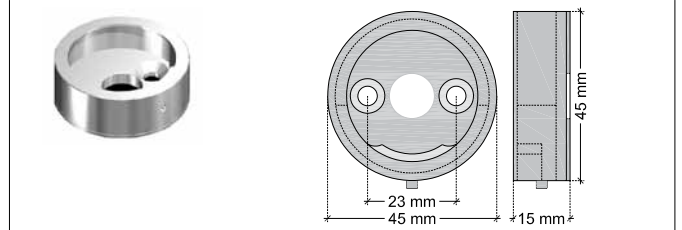

#### ON REQUEST

Fixation	FC-W: Median Support
Reflector	RIP
Connection	IDP: Door Switch
Dimming Option	Phase 220V, Dali, KNX Ask technical departement for more information


#### LIGHTING SOURCE

Lighting Source	Xenon Long Life	
Glass	Clear or Frosted	
Power	3W	5W
Voltage	24V	24V
Beam Angle	360°	360°
Color Temperature	2300K	2400K
Light Output lm/unit	12.6lm	40lm
Lifetime	20'000h	20'000h

#### MEDIAN SUPPORT : FC-W

Every 900mm for a safe installation

Not available in plywood

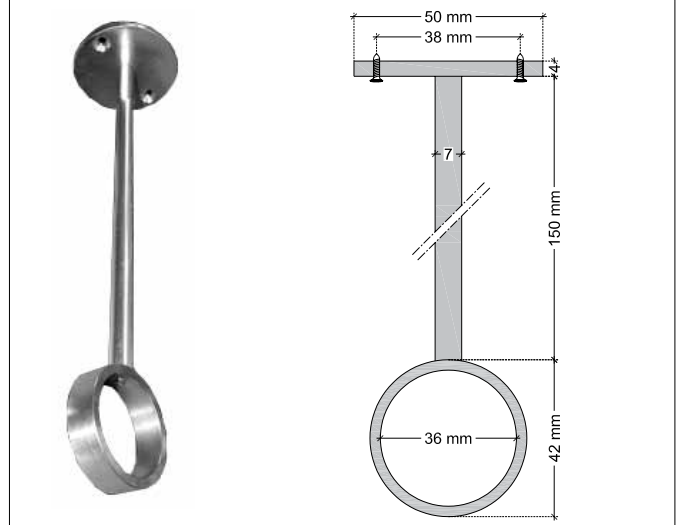

#### CERTIFICAT



#### AGABEKOV

## TECHNICAL DATA SHEET

### Hanging Rod with Light / INSTALLATION

VERSION - 03.08.2016

