

## TECHNICAL DATA SHEET

### AMLAL IP44 / Aga-Led® Type B

VERSION - 02.09.0215


#### STANDARD LUMINAIRE

Reference	AMLAL
Protection Class	IP44
Lighting Source	Aga-Led® Type B
Connector	Rigid Loop on B'Light conductor 16mm <sup>2</sup>
Dimensions	120 x 60mm
Standard Length	610 - 910 - 1210 - 1510mm
Length on measure	on request up to 2965
Nb Lighting Unit	17 LED/m
Voltage	24V
Power	20.4 W/m
Connecting Cable	1m standard cable 2x1.5mm <sup>2</sup>
Fixation	FIX
End Caps	ARL + EFA

#### APPLICATION: Miroirs, walls



#### AMLAL / AGA-LED® TYPE B - Rigid Loop

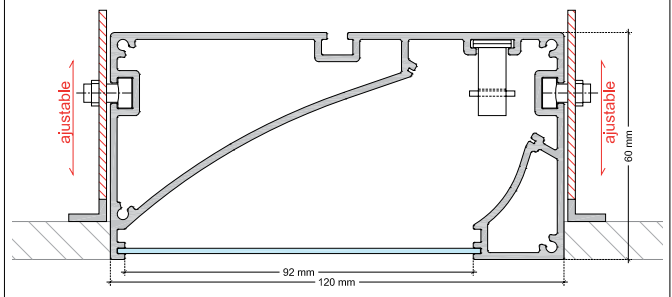

#### FINISH

##### Color Finishing Profil

Standard	Natural Anodised Aluminium
On request	Thermo-Enameling Powder Coating RAL Color Anodising Polished Aluminium Chrome or Gold Aspect Plywood

##### Glass Finishing

Standard	VER: Opaline Glass
On request	VERC: Clear Glass


#### ON REQUEST

Connecting Plug	AMS / AF
Dimming Option	1-10V, Dali, KNX <i>Ask technical departement for more information</i>

#### LIGHTING SOURCE

Lighting Source	Aga-Led® Type B - Generation 2			
Ref	B2	B3	B4	B6
Voltage	24V	24V	24V	24V
Power	1.2W	0.96W	1.2W	1.2W
Beam Angle	120°	120°	120°	120°
CRI	80	80	80	80
Color Temperature	lm/Unit			
2000K	40 ~ 68	40 ~ 82	46 ~ 78	70 ~ 118
2400K	48 ~ 81	58 ~ 97	55 ~ 93	83 ~ 140
2800K	68 ~ 114	82 ~ 137	66 ~ 111	99 ~ 166
4000K	68 ~ 114	82 ~ 137	66 ~ 111	99 ~ 166
Lifetime / L70 at 25°	50'000h / 36'000h			
Working T°	-20°C to +45°C			
Environmental protection	Modified acrylate resin			

#### FIXATION : FIX



#### ON REQUEST

##### Connecting plug AF/AMS



#### CERTIFICAT



#### AGABEKOV



**AGABEKOV SA Manufacture** 6, ROUTE DE COMPOIS  
CH-1222 VÉSENAZ - GENEVA - SWITZERLAND  
Tel. +41 22 752 47 45 Fax. +41 22 752 37 08  
E - mail: info@agabekov.com



**AGABEKOV SA Bureau d'etudes** 6, ROUTE DE COMPOIS  
CH-1222 VÉSENAZ - GENEVA - SWITZERLAND  
Tel. +41 22 752 47 45 Fax. +41 22 752 37 08  
Internet: www.agabekov.com

