

TECHNICAL DATA SHEET

Ceiling Linear Lighting / LT2AL-LPS / Aga-Led® Type B

VERSION - 14.06.2018

STANDARD LUMINAIRE

Reference	LT2AL-LPS
Protection Class	IP20
Lighting Source	Aga-Led® Type B
Connector	Rigid Loop on B'Light conductor 16mm ²
Dimensions - mm	ø33 x Ht.373 x Length: 1200mm <i>Power Supply Profil: 40x35x410mm</i>
Length on measure	up to 4500mm <i>Ask technical departement for more information</i>
Nb Lighting Source	17 LED/m
Voltage	220V - 24V Power Supply Included
Power	With B3: 16.32W/m / With B6: 20.4W/m
Dimmable	Yes, 1-10V or Dali
Grid	GTR
End Caps	EPR190: Aluminium

APPLICATION : CEILING



FINISH

Color Finishing Profil

Standard	Natural Anodised Aluminium
<i>On request</i>	<i>Thermo-enameling</i> <i>Powder Coating RAL</i> <i>Color Anodising</i> <i>Polished Aluminium Chrome Aspect</i> <i>Polished Aluminium Gold Aspect</i>

ON REQUEST

Cover	VFC: Clear Glass - VFO: Opaline Glass
Dimming Option	1-10V, Dali, KNX <i>Ask technical departement for more information</i>

LIGHTING SOURCE


Lighting Source **Aga-Led® Type B - Generation 2**

Ref	B3	B6	
Power	0.96W	1.2W	
Voltage	24V	24V	
Beam Angle	120°	120°	
CRI	80	80	
Lifetime	50'000h		
Working T°	-20°C to +45°C		

Environmental protection Modified acrylate resin

Color Temperature & Luminous Flux / Unit

	2200K	2400K	2700K	3000K	4000K
Aga-Led® B3-G2	- -	97 lm	137lm	137lm	137lm
Aga-Led® B6-G2	129 lm	140 lm	166 lm	166 lm	166 lm

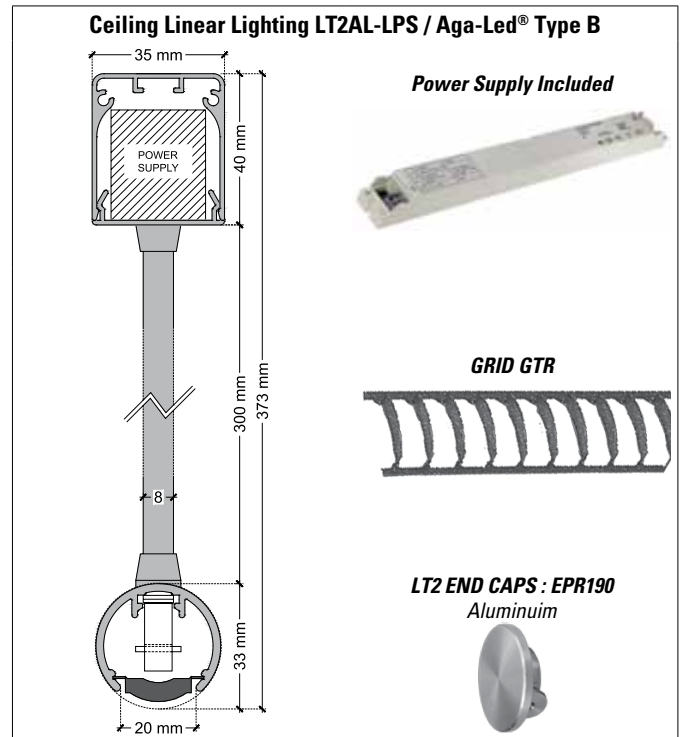

CERTIFICAT



AGABEKOV



AGABEKOV SA Manufacture 6, ROUTE DE COMPOIS
CH-1222 VÉSENAZ - GENEVA - SWITZERLAND
Tel. +41 22 752 47 45 Fax. +41 22 752 37 08
E - mail: info@aaabekov.com



AGABEKOV SA Bureau d'etudes 6, ROUTE DE COMPOIS
CH-1222 VÉSENAZ - GENEVA - SWITZERLAND
Tel. +41 22 752 47 45 Fax. +41 22 752 37 08
Internet: www.aaabekov.com

