

TECHNICAL DATA SHEET

LED Down Light / EN-DLA020-01, EN-DLA030-01, EN-DLA038-01

VERSION - 21.07.2017

STANDARD LUMINAIRE

Reference	EN-DLA020-01	EN-DLA030-01	EN-DLA038-01
Power	20 W	30 W	38 W
Current	500 mA	700 mA	900 mA
Protection Class	IP20 or IP44	IP20 or IP44	IP20 or IP44

Dimensions	ø200 x Ht.121.5mm
Cut-Out	ø170-180mm
Voltage	AC220-240V, 50-60Hz
Led Type	Cree Cob
CRI	80+ OR 90+
Beam Angle	24°, 40°, 60°
Dimmable	Yes
Orientable	30° on 2 axes
Working T°	-20°C ~ +45°C
Warranty	5 years

APPLICATION:

- perfect replacement for halogen lamp, incandescent bulb
- recessed lighting
- comemrcial lighting
- IP44 bathroom lighting,



FINISH

Standard	Black+White, Black
Heat Sink	Fin-Style 6063 aluminium

ON REQUEST

CRI	80+, 90+
Beam Angle	24°, 40° or 60°
Protection Class	IP20 or IP44
Dimming Option	Triac, Dali, 1-10V <i>Ask technical departement for more information</i>

COLOR TEMPERATURE & LUMINOUS FLUX

EN-DLI020-01

2'700K	3'000K	4'000K	5'000K
1620 lm ±5%	1710 lm ±5%	1805 lm ±5%	1860 lm ±5%

EN-DLI030-01

2'700K	3'000K	4'000K	5'000K
2415 lm ±5%	2550 lm ±5%	2710 lm ±5%	2790 lm ±5%


EN-DLI038-01

2'700K	3'000K	4'000K	5'000K
3002 lm ±5%	3192 lm ±5%	3378 lm ±5%	3463 lm ±5%

CERTIFICAT

CE RoHS  

TECHNICAL DRAWINGS

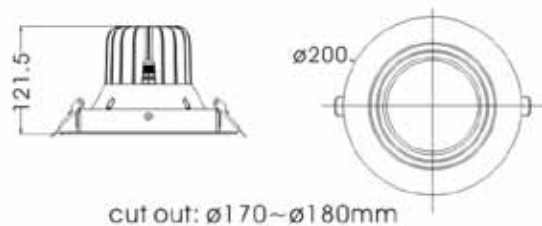

AGABEKOV



AGABEKOV SA Manufacture 6, ROUTE DE COMPOIS
CH-1222 VÉSENAZ - GENEVA - SWITZERLAND
Tel. +41 22 752 47 45 Fax. +41 22 752 37 08
E - mail: info@aaabekov.com



AGABEKOV SA Bureau d'etudes 6, ROUTE DE COMPOIS
CH-1222 VÉSENAZ - GENEVA - SWITZERLAND
Tel. +41 22 752 47 45 Fax. +41 22 752 37 08
Internet: www.aaabekov.com

